


TOP VIEW
OPENING SEQUENCE

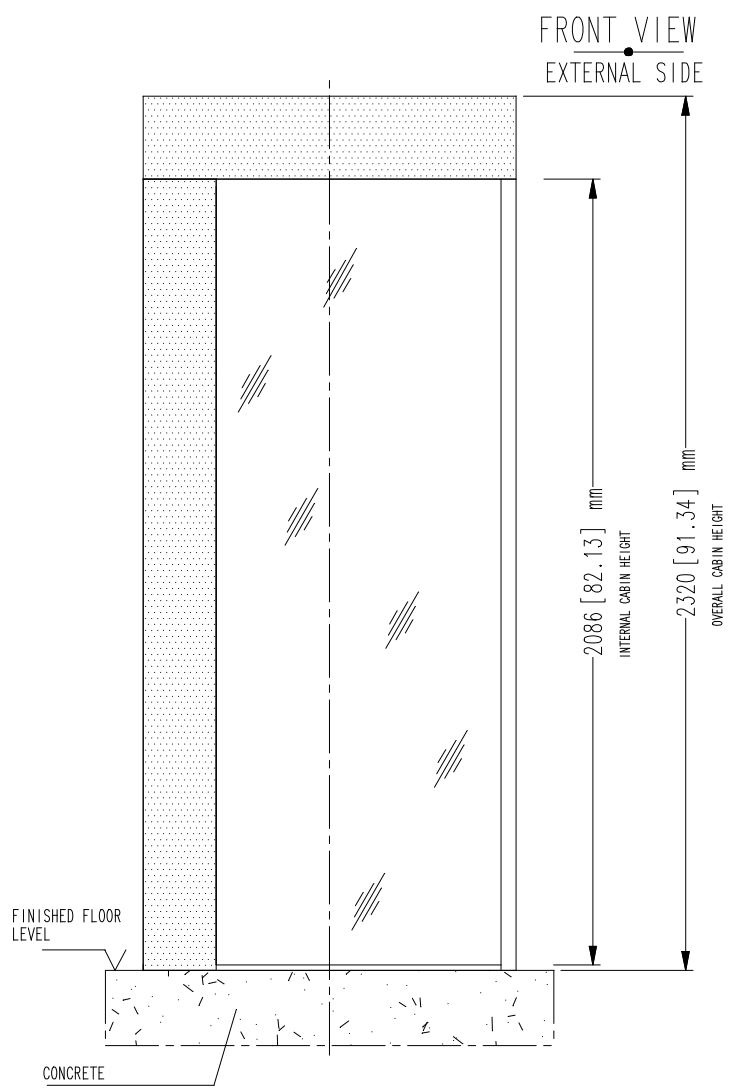

NOTE:
GENERAL CONSTRUCTION TOLERANCE: ± 5 mm [± 0.2 "]
INSTALLATION REQUIREMENT
SPACE FOR MAINTENANCE ABOVE TOP OF THE CABIN ON THE INTERNAL SIDE:
*MIN. 300 mm [11.81"]
*RECOMMENDED 750 mm [29.53"]
*if space does not meet the required specifications contact us to discuss alternatives

NOTE:
-unit must be installed on to a level floor (suggested flatness tolerance: ± 1 mm)
- coating option:
-4 mm in addition to size (overall dimensions)
-4 mm in subtraction to size (cabin entrance width)

2	25/03/2024	CORRETTO DISEGNO	ISABELLA
REV	DATE	REVISION DESCRIPTION	DRAWN BY
DRAWN BY: ADMINISTRATOR		DESIGNED AND MANUFACTURED BY: aalluser INDUSTRIE designed for your security	DISTRIBUTED BY:
DATE: 18/11/2009			
DRAWING NUMBER: EARC114			
REVISION: 2			
SCALE: 1:20		TITLE/DESCRIPTION	Flush mounted to floor (no recess required)
PAGE 1 OF 1		DIMENSIONI D'INGOMBRO BUSSOLA C101	Overall dimensions and mechanical installation requirement

THIS DOCUMENT IS AN ALLUSER INDUSTRIE PROPERTY AND IT CANNOT BE COPIED OR TRANSFERRED TO THIRD PARTIES WITHOUT A PREVIOUS WRITTEN AUTHORIZATION. DUE TO OUR POLICY OF CONTINUOUS PRODUCT DEVELOPMENT, ALL DIMENSIONS AND SPECIFICATIONS DESCRIBED IN THIS DOCUMENT ARE SUBJECT TO CHANGE WITHOUT NOTICE